


22.5mm Series


Sunmulon provides " Space saving " for your products.

Various size of button, various type of Illumination available in same depth 22.5mm.


EH

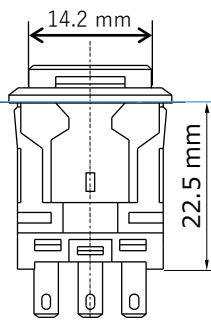


EH-G

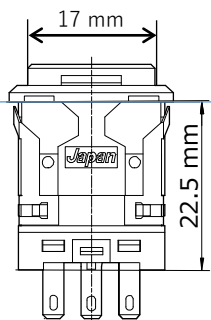







XH

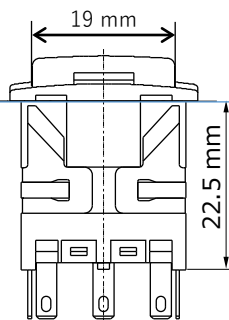




YH

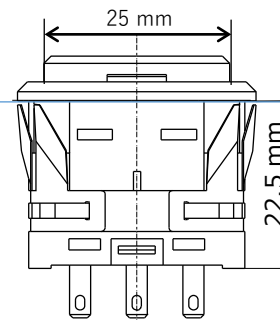

TA

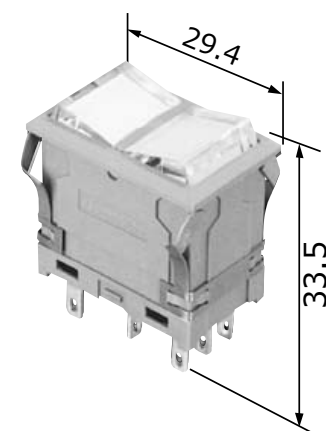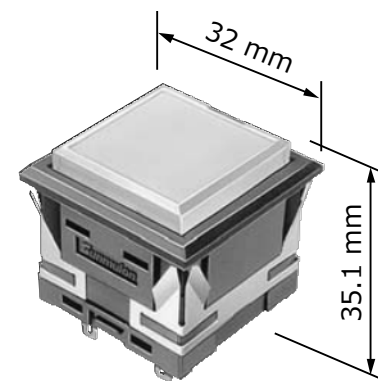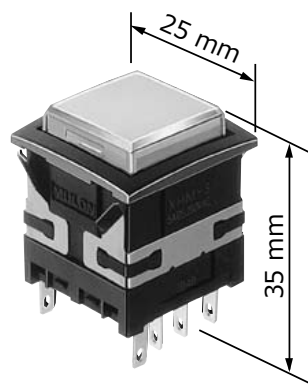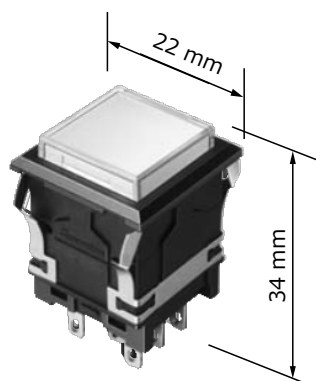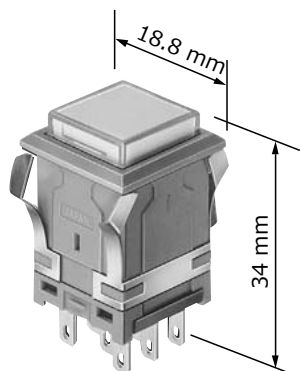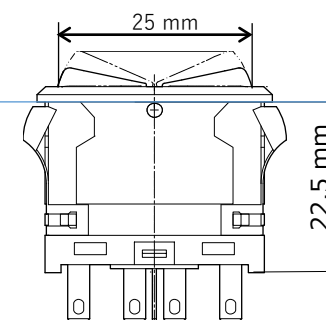

EH

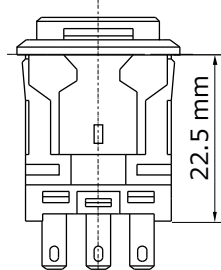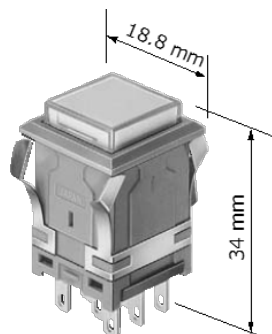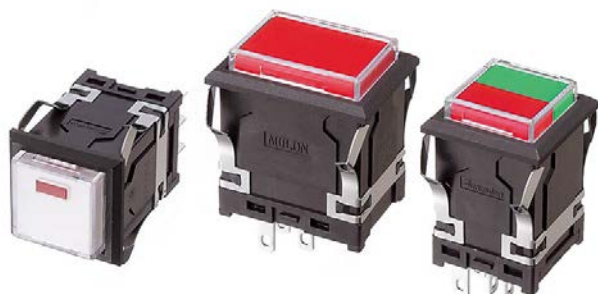

Contact Ratings :
(Resistive load)

AC125V, 250V 3A : Silver (Gold Plated) contacts
AC125V, DC30V 0.1A : Crossbar contacts



Electrical Life :

100,000 operations minimum: Silver (Gold Plated) contacts
100,000 operations minimum: Crossbar contacts











Mechanical Life :

2,000,000 operations minimum: Momentary
200,000 operations minimum: Alternate



Button Shape :

-  14.2mm Square, Dimple • Square
-  14.2 × 20.4mm Rectangle, Dimple • Rectangle

Illumination Type :

- Single Color   Red, Green, Orange-Yellow, Super Blue, Super White, Super Green
- Dual Color   Red • Green, Red • Super Blue, Red • Super White, Red • Super Green, Green • Orange-Yellow, Orange-Yellow • Red, Orange-Yellow • Super Blue, Super Blue • Super White, Super White • Super Green, Super Green • Super Blue
- Split-Face    
- Spot   Red, Green, Orange-Yellow

EH-G

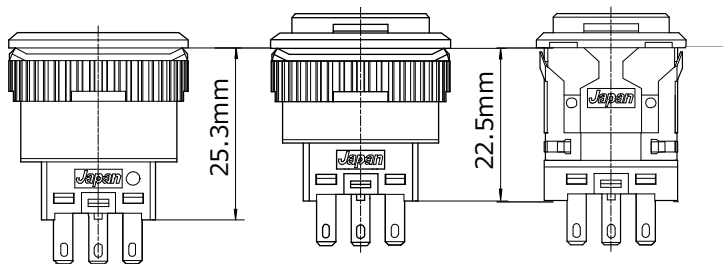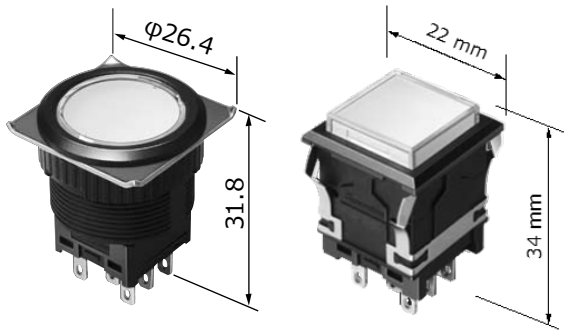

(*Flat Button)

(Standard Button)

Contact Ratings :
(Resistive load)

AC125V, 250V 3A : Silver (Gold Plated) contacts
AC125V, DC30V 0.1A : Crossbar contacts



Electrical Life :

60,000 operations minimum: Silver (Gold Plated) contacts
100,000 operations minimum: Crossbar contacts

Mechanical Life :

2,000,000 operations minimum: Momentary
200,000 operations minimum: Alternate

Button Shape :



-  20.2mm Round • standard, Round • flat
-  17mm Square • standard, Square • flat

Illumination Type :

- Single Color   Red, Green, Orange-Yellow, Super Blue, Super White, Super Green
- Dual Color   Red • Green, Red • Super Blue, Red • Super White, Red • Super Green, Green • Orange-Yellow, Orange-Yellow • Red, Orange-Yellow • Super Blue, Super Blue • Super White, Super White • Super Green, Super Green • Super Blue

* Depth of Flat Button : 25.3mm

XH

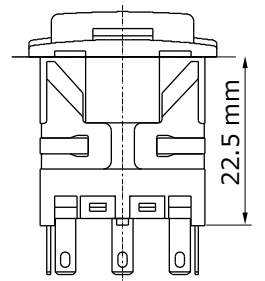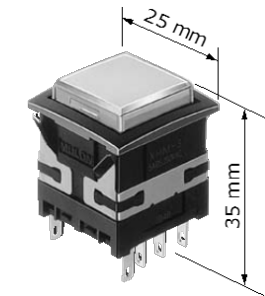

Contact Ratings :
(Resistive load)

AC125V, 250V 5A : Silver (Gold Plated) contacts
AC125V, DC30V 0.1A : Crossbar contacts

Electrical Life :

50,000 operations minimum: Silver (Gold Plated) contacts
100,000 operations minimum: Crossbar contacts




Mechanical Life :

1,000,000 operations minimum: Momentary
200,000 operations minimum: Alternate



Button Shape :

- 19mm Square
- 19 × 26mm Rectangle

Illumination Type :

- Single Color  Red, Green, Orange-Yellow, Super Blue, Super White, Super Green
- Dual Color  Red•Green, Red•Orange-Yellow, Red•Super Blue, Red•Super White, Red•Super Green, Orange-Yellow•Green, Orange-Yellow•Super Blue, Orange-Yellow•Super White, Orange-Yellow•Super Green, Super Blue•Super White, Super Blue•Super Green, Super Green•Super White
- Split-Face 

YH

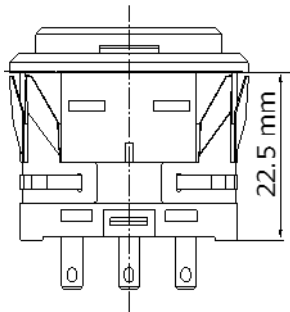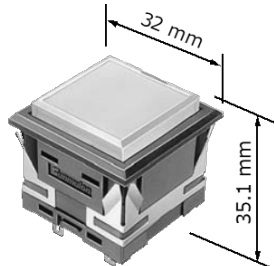

Contact Ratings :
 (Resistive load)

AC125V, 250V 3A : Silver (Gold Plated) contacts
 AC125V, DC30V 0.1A : Crossbar contacts


Electrical Life :

100,000 operations minimum: Silver (Gold Plated) contacts
 100,000 operations minimum: Crossbar contacts




Mechanical Life :

2,000,000 operations minimum: Momentary
 200,000 operations minimum: Alternate



Button Shape :

 25mm Square

Illumination Type :

- Single Color  Red, Green, Orange-Yellow
- Dual Color  2 Red•Green, Red•Orange-Yellow, Orange-Yellow•Green
- Split-Face 

TA

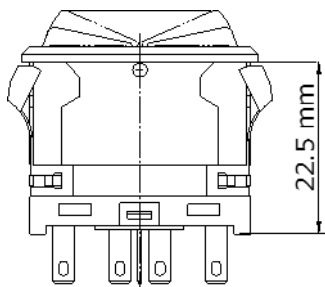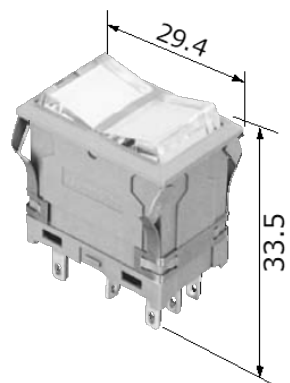

Contact Ratings :
(Resistive load)

AC125V, 250V 5A : Silver (Gold Plated) contacts
AC125V, DC30V 0.1A : Crossbar contacts

Electrical Life :

30,000 operations minimum: Silver (Gold Plated) contacts
100,000 operations minimum: Crossbar contacts




Mechanical Life :


1,000,000 operations minimum: Momentary
200,000 operations minimum: Alternate

Button Shape :



Illumination Type :

Single Color		Red, Green, Orange-Yellow, Super Blue, Super Green
Dual Color		Red•Green Green•Orange-Yellow Orange-Yellow•Red
Split-Face		

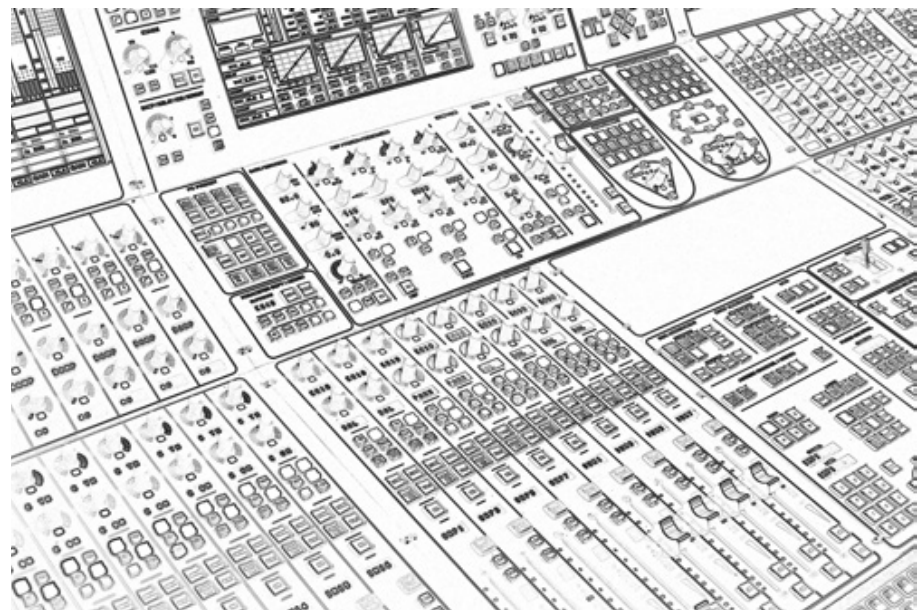

Sunmulon provides " Space saving " for your products.

