


MH

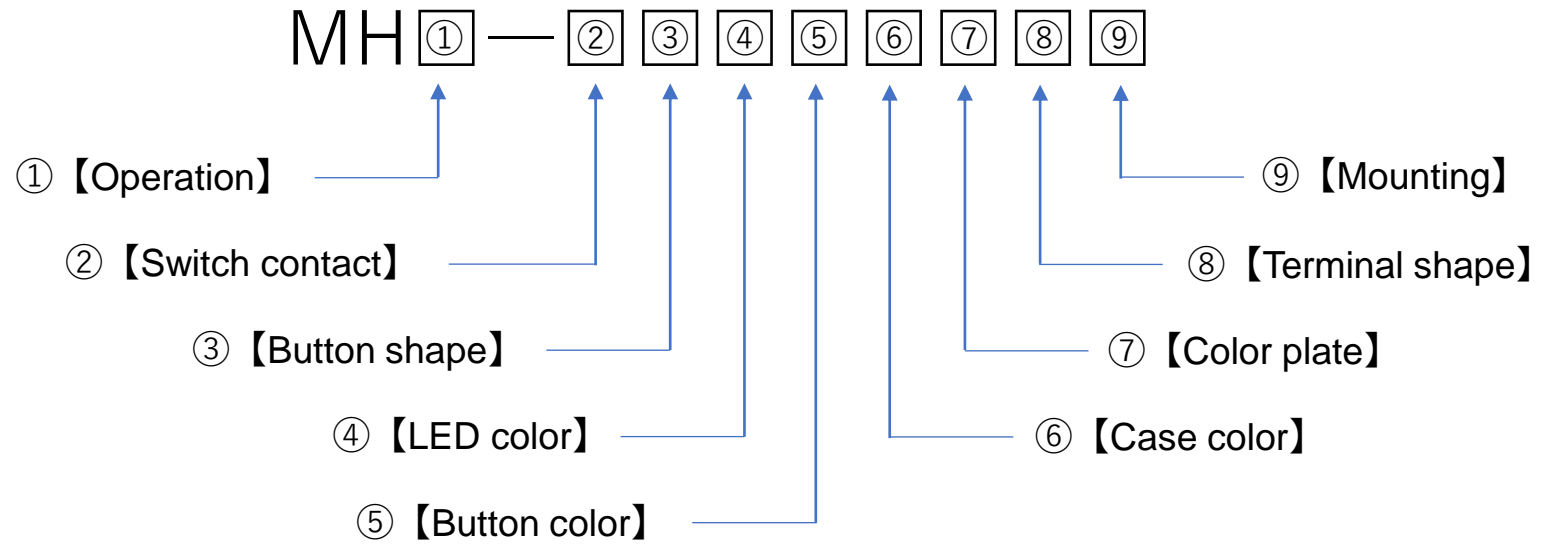

MH

MH ① — ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① 【Operation】 (Distinguished by Marking)

Marking = Product code

※ Ref. (A)

Product code
M
A
L

② 【Switch contact】 (Distinguished by Marking)


Marking = Product code

Marking	Product Code
1	1
2	2
(without Marking)	(Blank)


※ Ref. (B)

③ 【Button shape】 (Distinguished by Appearance)


Button shape	Product code
Round	R
Square	S
Rectangular	W




(Round)



(Square)



(Rectangular)

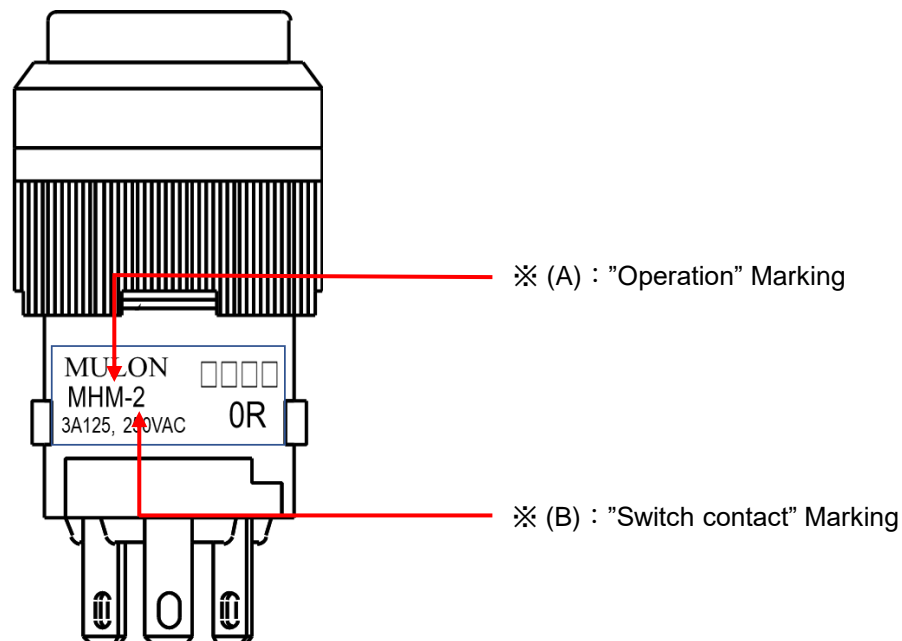

MH



④ 【LED Color】 (Distinguished by Marking and LED terminal)

Marking	LED terminal	Product code
R	With	70
G	With	80
Y	With	90
0R	With	71
0G	With	81
0Y	With	91
(Without)	With	0
(Without)	Without	(Blank)

※ Ref. (C)


⑤ 【Button color】 (Distinguished by Appearance)

Button color	Product code
Red	R
Green	G
Orange Yellow	Y
Milk-White	M
Clear	C
(without Button)	X

⑥ 【Case color】 (Distinguished by Appearance)


※ 「Case color」 = 「Switch unit color」

Flange color	Product code
Black	B
Gray	G

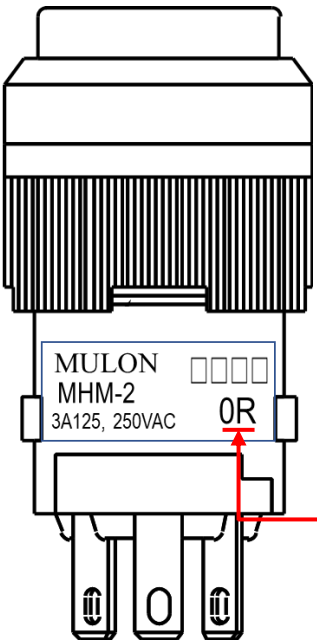


※ (C) : "LED color" Marking

[BOTTOM VIEW]

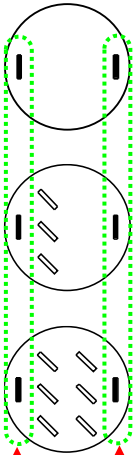

※ LED terminal




MH

MH ① — ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


⑦ 【Color plate】 (Distinguished by Appearance)

Color plate	Product code
Red	1
Green	2
Orange Yellow	3
Milk-White	4
(without Color plate)	(Blank)

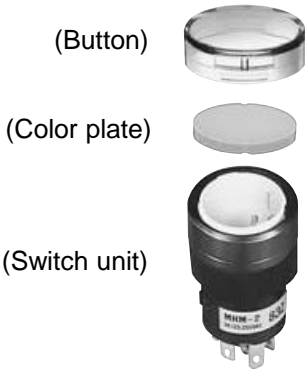


⑧ 【Terminal Shape】 (Distinguished by Appearance)


Terminal shape	Product code
Solder tab terminal #110	S
PC board terminal	C

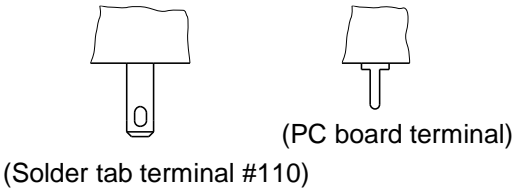

⑨ 【Mounting】 (Distinguished by Appearance)

Mounting	Product code
Snap-in	1
Bushing	2

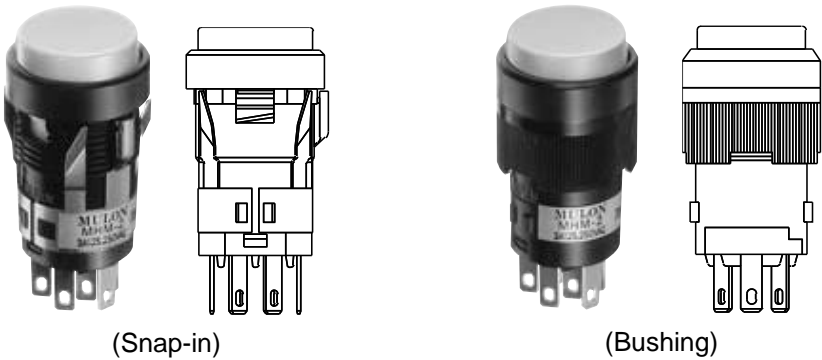

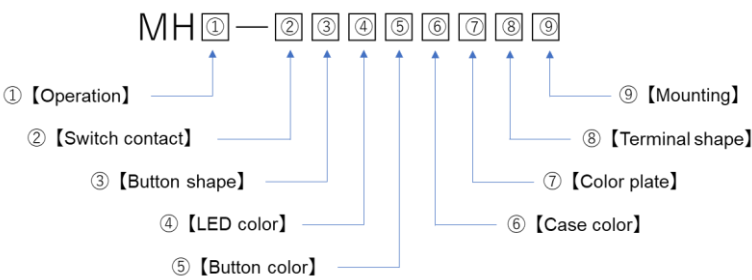

ex.) MHM—2R71CB1S2

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① 【Operation】 M

② 【Switch contact】 2

④ 【LED color】 0R : 71

⑧ 【Terminal shape】 Solder tab terminal #110 : S

(Button)

(Color plate)

(Switch unit)

③ 【Button shape】 Round : R

⑤ 【Button color】 Clear : C

⑦ 【Color plate】 Red : 1

⑥ 【Case color】 Black : B

⑨ 【Mounting】 Bushing : 2